



IN-CAR-LOCKER

Cable Usage Instructions

1: Cable: The security cable comes with a large loop and a small loop. Before proceeding identify which loop is which.

2: Non-Locker Side:

A. Run cable around fixed object.

E.g. seat track of car, plumbing pipe in or bed frame.

B. Run *large* cable loop thru *small* cable loop.

C. Attach large cable loop to locker (see below)

E.g. cable around seat track of car



3: Locker side:



A. Place *large* loop INTO the notch in the latching bracket at an angle as shown.

B. Press "V" in the cable at the crimp as close to the bracket/notch as possible.

C. Rotate loop in line with the bracket.

D. Push *large* loop over the latching bracket with other hand and set cable in 2nd notch of bracket;

E. Take the "tail" of the cable and place it in the notch in the side of the locker.

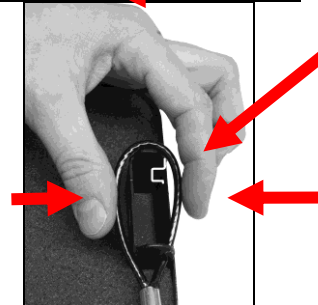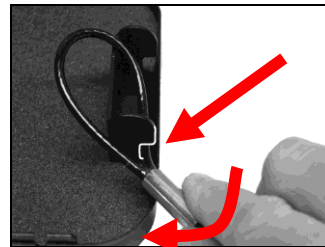

The locker is now ready to secure your property or remain in place until you are ready to use it.

NOTE: Verify that the cable is properly installed each time you insert your gun(s) and other valuables into the locker.




Combo Lock Re-set Instructions

The delivery setting for the combo lock is code "000".

To change the setting on your lock, accomplish the following:

1. Rotate the lock knob in the open position.
2. On the rear face of the lock and press the code set tab inward and up from the "A" position to the "B" position.
3. Set the combination lock numbers to the desired setting.
4. Rotate the lock knob back to the locked position.
5. Press the code set tab back from to the "A" position.

Your new combo code is set and your locker is ready to use.

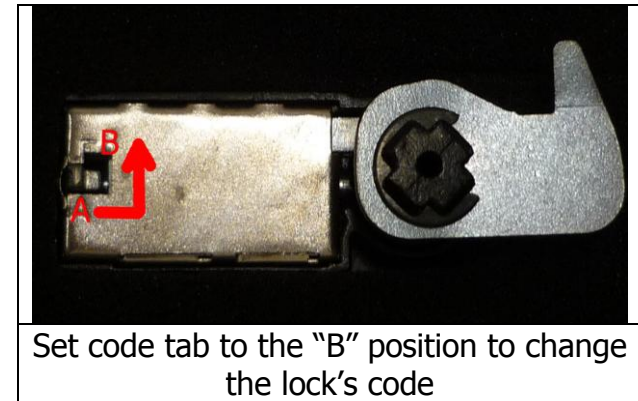

Still have questions or want to comment on this product?

Contact your local dealer or contact us directly:

Phone: 952-807-7354, email: info@center-of-mass.com

www.center-of-mass.com